




PHP NorthWest 2009 - Manchester, UK

Derick Rethans - dr@ez.no - @derickr

<http://derickrethans.nl/talks.php> - <http://joind.in/619>

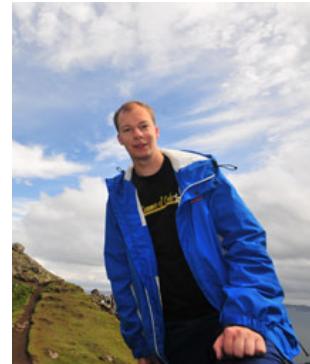

Derick Rethans
derick@php.net

- Dutchman living in London
- Project lead for eZ Components at eZ Systems A.S.
- PHP development
- Author of the mcrypt, input_filter and date/time extensions
- Author of Xdebug

How did it start?

```
[derick@localhost derick]$ cat recursive.php
<?php
    function a() {
        a();
    }

    a();
?>
[derick@localhost derick]$ php recursive.php
Segmentation fault
```

- Stack overflow in PHP
- Infinite recursion

Xdebug protects with:

xdebug.max_nesting_level=4

(!) Fatal error: Maximum function nesting level of '4' reached, aborting! in /home/httpd/html/test/xdebug/infinite.php on line 11				
Call Stack				
#	Time	Memory	Function	Location
1	0.0008	62864	{main}()	..//infinite.php:0
2	0.0009	63528	a()	..//infinite.php:14
3	0.0009	63604	b()	..//infinite.php:6

Warning: fopen(ezcmailtest) [[function.fopen](#)]: failed to open stream: No such file or directory in **/home/httpd/html/test/ezc/dr_mail_test.php** on line **147**

... is kinda useless.


(!) ezcMailTransportException: An error occurred while sending or receiving mail. Failed to connect to the server: dolly.ez.no:ezcomponents. in /dat/dev/ezcomponents/trunk/Mail/src/transports/transport_connection.php on line 57				
Call Stack				
#	Time	Memory	Function	Location
1	0.0005	53512	{main}()/dr_mail_test.php:0
2	0.0237	554800	ezcMailPop3Transport->__construct(string(11), string(12), string(12))/dr_mail_test.php:8
3	0.0256	594140	ezcMailTransport->portConnection->__construct(string(11), string(12))/dr_mail_test.php:147/pop3_transport.php:101
Variables in local scope (#3)				
\$server	=	'dolly.ez.no'	(length=11)	
\$errno	=	111		
\$port	=	'ezcomponents'	(length=12)	
\$errstr	=	'Connection refused'	(length=18)	
\$timeout	=	5		

xdebug.collect_params=1 and xdebug.show_local_vars=1



Demo

demo

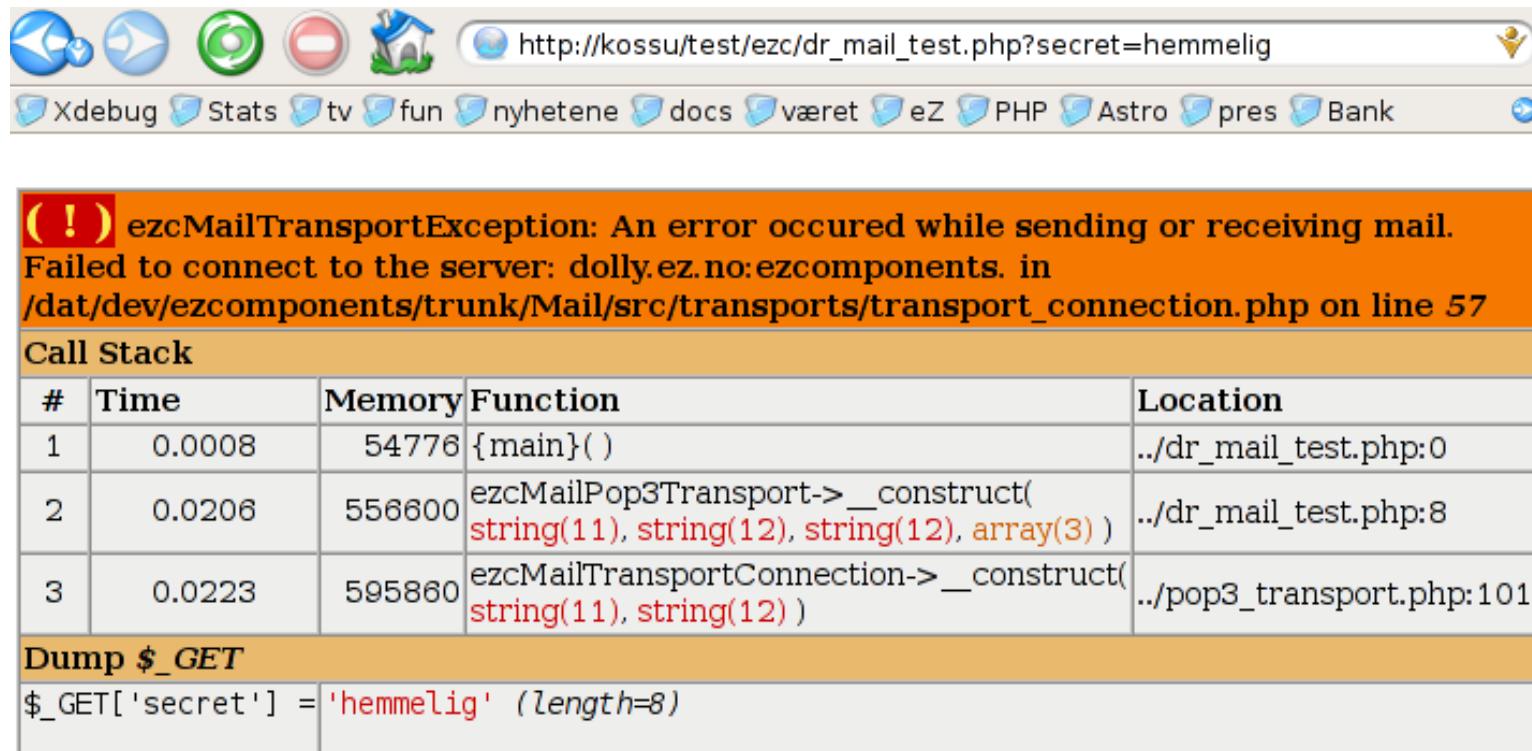

(!) **ezcMailTransportException**: An error occurred while sending or receiving mail.
Failed to connect to the server: dolly.ez.no:ezcomponents. in
/dat/dev/ezcomponents/trunk/Mail/src/transports/transport_connection.php on line 57

Call Stack				
#	Time	Memory	Function	Location
1	0.0008	54776	{main}()/dr_mail_test.php:0
2	0.0206	556600	ezcMailPop3Transport->__construct(string(11), string(12), string(12), array(3))/dr_mail_test.php:8
3	0.0223	595860	ezcMailTransportConnection->__construct(string(11), string(12))/pop3_transport.php:101

Dump <code>\$_GET</code>	
<code>\$_GET['secret']</code>	= 'hemmelig' (length=8)

`xdebug.dump.GET=*`

`xdebug.dump.POST=username,password`


Also for: COOKIE, ENV, FILES, REQUEST, SERVER and SESSION

```
array
0 => null
1 => 3.141592654
2 =>
    array
        'dutch' =>
            object(locale)[1]
                public 'lang' => 'nl' (length=2)
                public 'variation' => 'NL' (length=2)
                public 'charsets' =>
                    array
                        0 => 'iso-88591' (length=9)
                        1 => 'iso-8859-15' (length=11)
                private 'mb_supported' => false
                protected 'self' =>
                    &object(locale)[1]
                protected 'id' => 1

<?php
ini_set( 'xdebug.var_display_max_data', 25 );
ini_set( 'xdebug.var_display_max_depth', 4 );
ini_set( 'xdebug.var_display_max_children', 32 );

xdebug_var_dump(); // or just var_dump()
?>
```

Execution trace

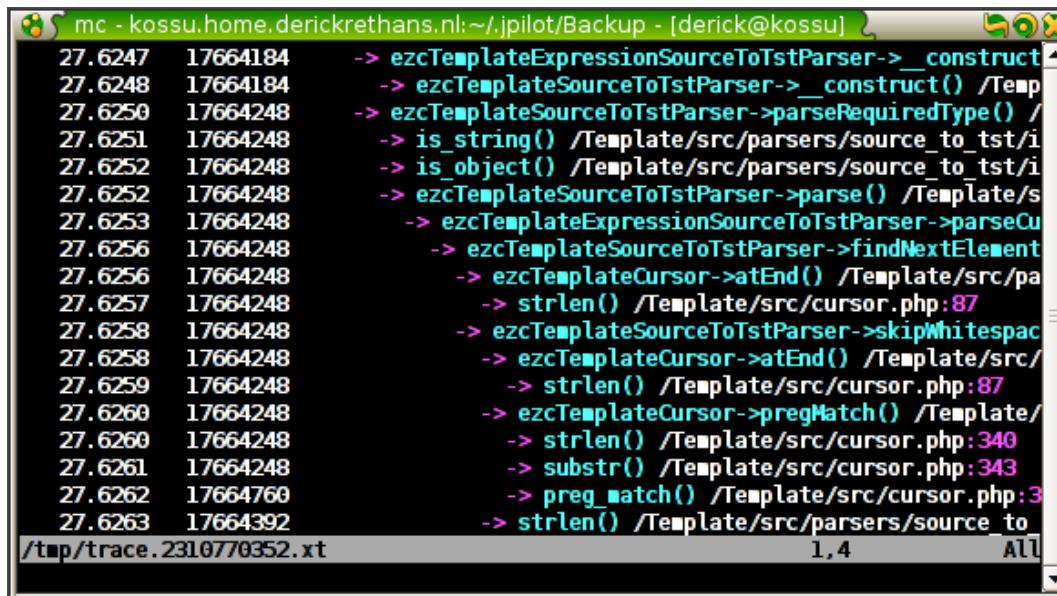

```
27.6247 17664184 -> ezcTemplateExpressionSourceToTstParser->__construct
27.6248 17664184   -> ezcTemplateSourceToTstParser->__construct() /Temp
27.6250 17664248   -> ezcTemplateSourceToTstParser->parseRequiredType() /
27.6251 17664248     -> is_string() /Template/src/parsers/source_to_tst/i
27.6252 17664248     -> is_object() /Template/src/parsers/source_to_tst/i
27.6252 17664248   -> ezcTemplateSourceToTstParser->parse() /Template/s
27.6253 17664248     -> ezcTemplateExpressionSourceToTstParser->parseCu
27.6256 17664248     -> ezcTemplateSourceToTstParser->findNextElement
27.6256 17664248       -> ezcTemplateCursor->atEnd() /Template/src/pa
27.6257 17664248         -> strlen() /Template/src/cursor.php:87
27.6258 17664248       -> ezcTemplateSourceToTstParser->skipWhitespac
27.6258 17664248         -> ezcTemplateCursor->atEnd() /Template/src/
27.6259 17664248           -> strlen() /Template/src/cursor.php:87
27.6260 17664248       -> ezcTemplateCursor->pregMatch() /Template/
27.6260 17664248         -> strlen() /Template/src/cursor.php:340
27.6261 17664248         -> substr() /Template/src/cursor.php:343
27.6262 17664760         -> preg_match() /Template/src/cursor.php:3
27.6263 17664392           -> strlen() /Template/src/parsers/source_to
/tap/trace.2310770352.txt          1,4      All
```

Some settings:


```
xdebug.auto_trace=1
xdebug.trace_output_dir=/tmp
xdebug.collect_params=1
xdebug.collect_return=1
xdebug.trace_output_name=trace.%c
```

- Specifiers:

http://xdebug.org/docs/execution_trace#trace_output_name

Execution trace to file

Automatic readable format

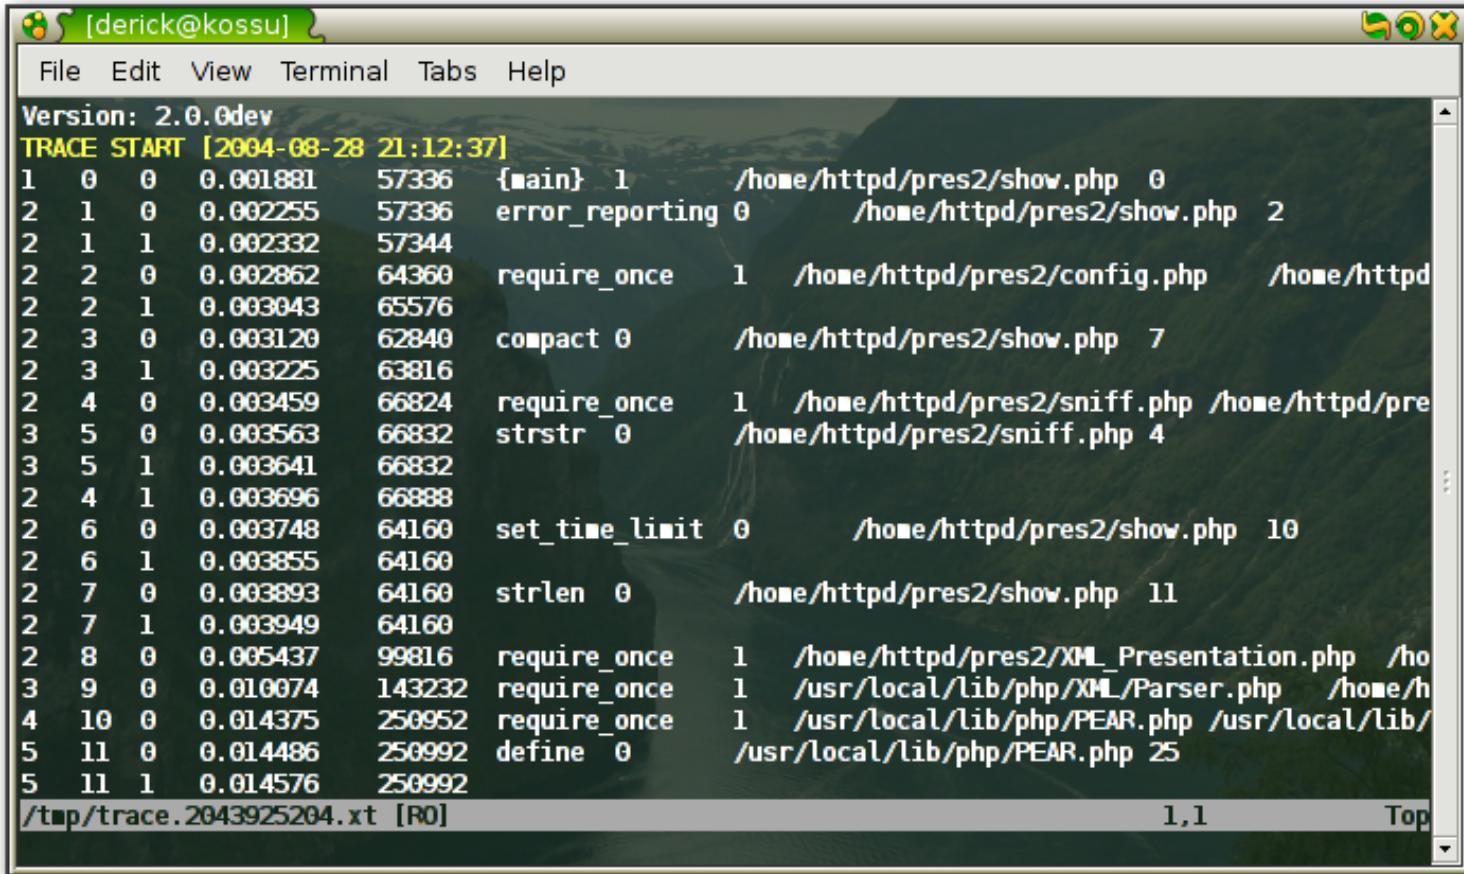

The screenshot shows a terminal window titled '[derick@kossu]' with a green background. The window title bar includes standard icons for minimize, maximize, and close. The menu bar contains 'File', 'Edit', 'View', 'Terminal', 'Tabs', and 'Help'. Below the menu is a message 'Version: 2.0.0dev'. The main area displays a trace log starting with 'TRACE START [2004-08-28 21:12:37]'. The log lists numerous PHP function calls with their line numbers, arguments, and file paths. For example, it shows the execution of 'main()', 'error_reporting()', 'require_once()', 'compact()', 'stristr()', 'set_time_limit()', 'strlen()', and several 'require_once()' calls for XML and PEAR libraries. The log ends with 'TRACE END [2004-08-28 21:12:37]'. The bottom of the terminal window shows the path '/tmp/trace.2043925204.txt [R0]' and status indicators '1,1' and 'Top'.

```
Version: 2.0.0dev
TRACE START [2004-08-28 21:12:37]
1 0 0 0.001881 57336 {main} 1 /home/httpd/pres2/show.php 0
2 1 0 0.002255 57336 error_reporting 0 /home/httpd/pres2/show.php 2
2 1 1 0.002332 57344
2 2 0 0.002862 64360 require_once 1 /home/httpd/pres2/config.php /home/httpd
2 2 1 0.003043 65576
2 3 0 0.003120 62840 compact 0 /home/httpd/pres2/show.php 7
2 3 1 0.003225 63816
2 4 0 0.003459 66824 require_once 1 /home/httpd/pres2/sniff.php /home/httpd/pre
3 5 0 0.003563 66832 strstr 0 /home/httpd/pres2/sniff.php 4
3 5 1 0.003641 66832
2 4 1 0.003696 66888
2 6 0 0.003748 64160 set_time_limit 0 /home/httpd/pres2/show.php 10
2 6 1 0.003855 64160
2 7 0 0.003893 64160 strlen 0 /home/httpd/pres2/show.php 11
2 7 1 0.003949 64160
2 8 0 0.005437 99816 require_once 1 /home/httpd/pres2/XML_Presentation.php /ho
3 9 0 0.010074 143232 require_once 1 /usr/local/lib/php/XML/Parser.php /home/h
4 10 0 0.014375 250952 require_once 1 /usr/local/lib/php/PEAR.php /usr/local/lib/
5 11 0 0.014486 250992 define 0 /usr/local/lib/php/PEAR.php 25
5 11 1 0.014576 250992

/tmp/trace.2043925204.txt [R0] 1,1 Top
```

```
xdebug.auto_trace=1      ; enable tracing
xdebug.trace_format=1 ; selects computerized format
xdebug.trace_options=0 ; sets extra option (1 = append)
```

- HTML traces
- Tracing only parts of an application with `xdebug_start_trace()` and `xdebug_stop_trace()`.
- Fetching the trace file name that is being used with `xdebug_get_tracefile_name()`.
- Changing how much data is shown with `xdebug.var_display_max_children`,
`xdebug.var_display_max_data` and
`xdebug.var_display_max_depth`.




Demo

demo

Profiling


KCacheGrind's Flat Profile and Call List

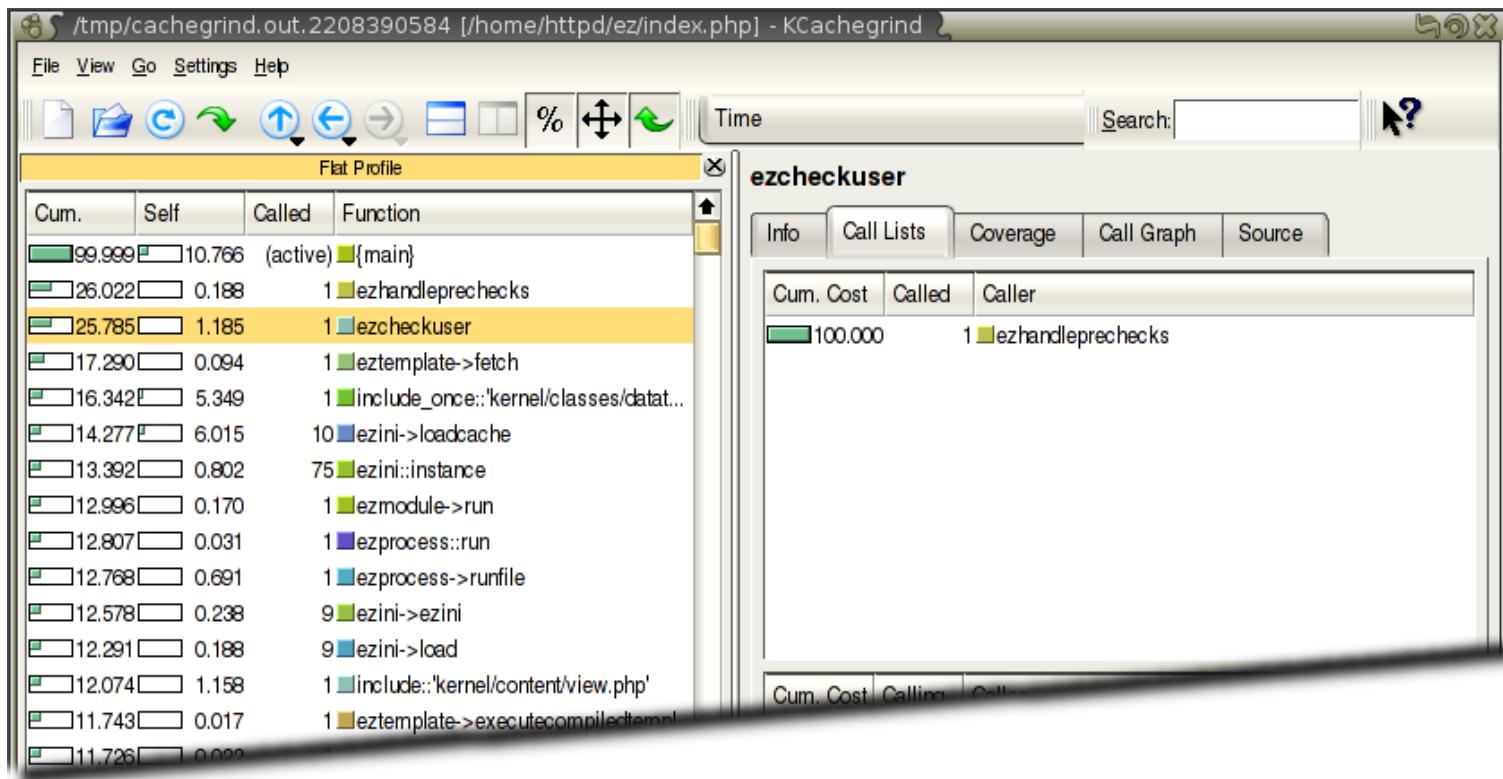

```
xdebug.profiler_enable=1          ; enable profiler
xdebug.profile_output_dir=/tmp      ; output directory
xdebug.profile_output_name=cachegrind.out.%p
```

Profiling

KCacheGrind's Call Graph and Source Annotations

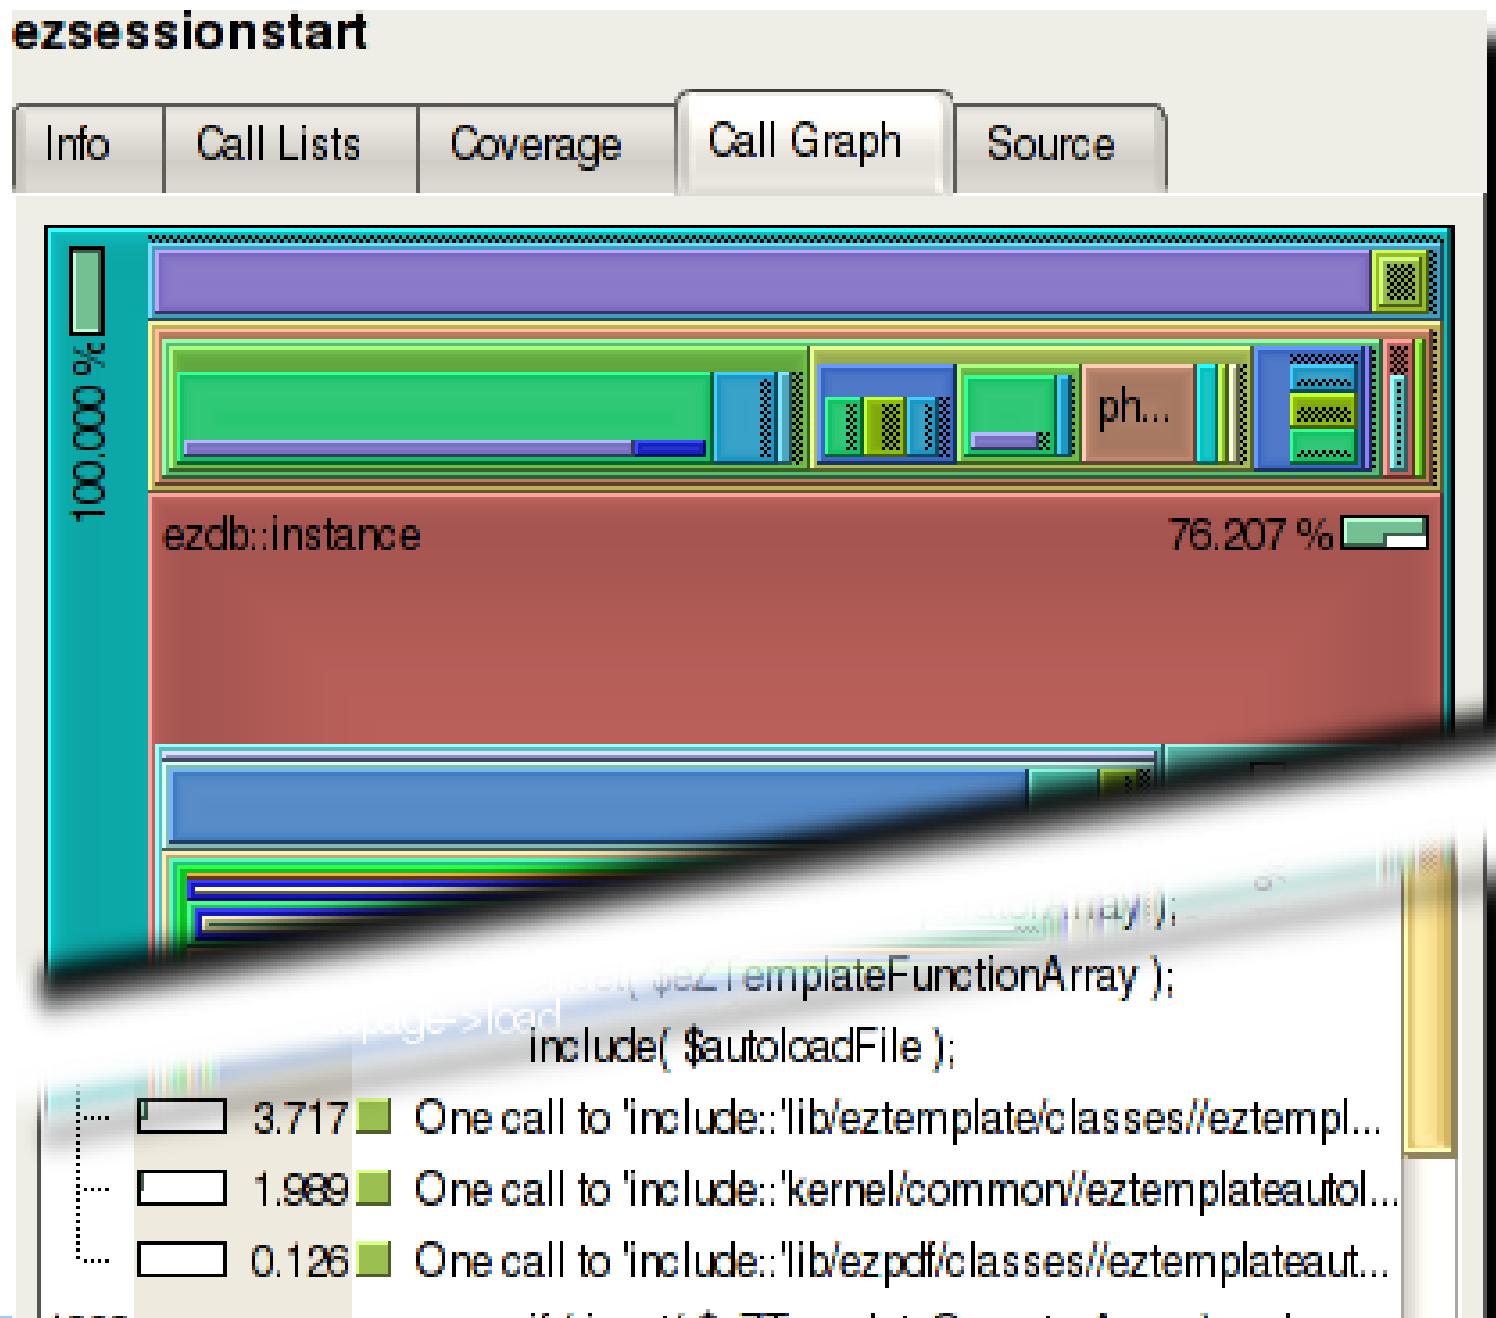



Demo

demo

- DBGp, common Debugging protocol
- Cross-language: PHP, Python, Perl...
- Supported in Xdebug 2
- Clients: Komodo, Eclipse/PDT, Netbeans (and many others smaller ones)
- Other clients and plugins:

php.ini settings:

```
xdebug.remote_enable=1  
xdebug.remote_handler=dbgp  
xdebug.remote_mode=req  
xdebug.remote_host=localhost  
xdebug.remote_port=9000  
xdebug.extended_info=1
```

On the shell:

```
export XDEBUG_CONFIG="idekey=xdebugrocks"
```

With a browser:

```
http://pres/show.php?
```

```
XDEBUG_SESSION_START=xdebugrocks
```

With a firefox extension:

```
http://gmckinney.blogspot.com/2008/02/xdebug-firefox-  
addon-for-profiling-and.html
```

```
http://tinyurl.com/6otvm4
```



Demo

demo



- Xdebug site: <http://xdebug.org>
- Xdebug documentation: <http://xdebug.org/docs.php>
- DBGp specification: <http://xdebug.org/docs-dbgp.php>
- These slides: <http://derickrethans.nl/talks.php>
- Questions?: derick@xdebug.org